


PN6XSM3Ti

3MP 3x Motorized Zoom IR Outdoor Camera



Features

- 3.0MP 1/2.8" Sony progressive scan CMOS image sensor
- 2.8-10mm Motorized zoom Smart Focus
- Local lens control by OSD switch and Remote lens control on UI
- 20m IR Beam Distance
- Multi Streaming of H.264 and M-JPEG
- H.264 : 20fps/ 2048x1536, M-JPEG : 20fps/ QVGA
- H.264 : 30fps/ 1920x1080, M-JPEG : 30fps/ QVGA
- Integrated motion detection with pre- and post-alarm image/video buffering
- Event-Triggered FTP and email upload of still images and videos
- Full Duplex Two-Way Audio Support(Optional)
- External microphone input & speaker output connector(Optional)
- Digital PTZ
- UPnP supported
- 1 Port analog video loop-out port
- Supports CBR and VBR modes
- Supports 12VDC/ IEEE 802.3af PoE injectors, mid- and end-spans
- Integrated HTTP Web server supporting 50 simultaneous user connections
- HTTPS supported(Hyper Text Transfer Protocol Secured)
- Integrated E-Mail, FTP, DDNS and DHCP client
- Extensive CGI API for software integration and remote programming operations
- Window based IP installer and license-free 16 CH NVR software
- Cable managed bracket
- IP67 Weatherproof

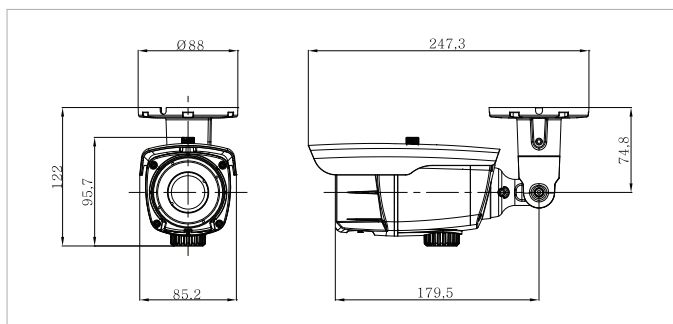

| MODEL | | PN6XSM3Ti |
|--------------------|-----------------------|---------------------------------------------------------------------------------|
| Classification | | Specification |
| General | CPU | 32-bit ARM9 RISC CPU up to 432MHz |
| | Video Buffer | 16Mbyte Video Frame Buffer |
| | Flash | 128Mbyte |
| | SDRAM | 128Mbyte |
| Image Pickup | Image sensor | 3.0 Megapixel 1/2.8" SONY progressive scan CMOS image sensor |
| | Total Pixels | 2144(H) x 1588(V) 3.4 Megapixel |
| | Effective Pixels | 2096(H) x 1561(V) 3.27 Megapixel |
| | S/N Ratio | More than 50dB |
| | Min. Illumination | 0Lux (IR On) |
| | IR Distance | 20M |
| | Day & Night | ICR |
| Video | Lens | 2.8-10mm Smart Focus |
| | Video compression | H.264 baseline profile, Motion JPEG |
| | Resolutions | Up to 2048 x 1536 |
| | Frame rate | H.264 Up to 20fps with 2048x1536 MJPEG Up to 30fps with 1080p resolution |
| | Video streaming | Support multi stream with H.264, MJPEG |
| | | Adjustable frame rate |
| | Pan/Tilt/Zoom | VBR/CBR in H.264 |
| | | Digital PTZ |
| | Image setting | Day & Night |
| | | Auto White Balance |
| | | Auto Exposure |
| | | Privacy Mask |
| Audio (Option) | Output | Effect - Color, Sharpness, Mirror/V-Flip, etc. |
| | | BNC x1, 1.0Vp-p, 75 ohm Composite Video, NTSC/PAL |
| | | Audio streaming |
| | | Two-way, full duplex |
| | Audio compression | G.711 |
| | Sample Rate | 8KHZ |
| | Data Rate | 64Kbps |
| Network | Audio input | Microphone input / 1 x Line-In (Mono)-Option |
| | Audio output | Line output/ 1 x Line-Out (Mono)-Option |
| | Security | Password protection User access log HTTPS encryption |
| System integration | Supported protocol | HTTP, HTTPS, FTP, SMTP, UPnP, DNS, DynDNS, NTP, RTSP, RTP, TCP, UDP, ICMP, DHCP |
| | Intelligent video | Motion detection up to 2048x1536 with 32x24 blocks |
| | Alarm trigger | Motion detection External input/Normal Open/Close Type |
| | Alarm events | File upload via ftp, e-mail Notification via email, FTP and TCP |
| | Video buffer | 16MB pre-alarm and post-alarm |
| | Firmware upgrade | Remote upgrade via network |
| | API | CGI Interface document ActiveX Interface(ocx(dll) + document) |
| Physical | Power Source | DC 12V/1.5A, PoE(Power over Ethernet): 802.3af |
| | Power Consumption | Max. 6.6W, Max. 11.4W with IR On |
| | Net Weight | 1500g |
| | LED's | Power, Network Connection |
| Environment | Dimension | 87.7mm(W) X 108.7mm(H) X 297mm(D) including Bracket |
| | Operating Temperature | -10 degree~50 degree Celsius (14F~122F) |
| | Storage Temperature | -20 degree~60 degree Celsius (-4F~140F) |
| Software | Included Software | NVR Lite (16 Channel), IP Installer (Windows Only) |
| Package | Package Contents | Network Camera, Use Manual, External Power Adaptor, Software CD |